







SUZUKI DF350AMD/300BMD\_DF350A/300B: A REVOLUTION IN INNOVATION



# NEW DF350AMD / 300BMD

- | Suzuki's First Integrated Steering System
- **Advanced New Gear Case**
- Available in 20 inch(L), 25 inch(X) and 30 inch(XX) transom height.

(only for DF350AMD / 300BMD)

- Integrated Steering System (only for DF350AMD / 300BMD)
- Streamlined appearance of the motorwell when rigging.
- Allows rigging to various types of boats.

There is no need to worry about interference between the external cylinder and the boat.





## Advanced New Gear Case

- Enhanced Durability & Reliability
  - By lowering the gear oil temperature
- Increased Top Speed

With the Advanced New Gear Case, Top Speed increased more than 2%.

\*the data is based on "In-House Suzuki Testing" under uniformed conditions. Results will vary depending upon operating conditions(boat design, size, weight, weather, etc).

■ Improved maintainability

Added new mechanism for easily changing gear oil.

- Improved Fuel Efficiency
- Reduced Gear Oil from 3.2ℓ → 2.8ℓ.
- **■** Enables installation on more boat transoms

# SUZUKI'S FIRST INTEGRATED STEERING SYSTEM




### ■ Simplified appearance on the motorwell

The Integrated Steering System enables rigging without external steering cylinder, resulting in a cleaner motorwell and an elegant appearance.


## ■ Prevents contact with the motorwell when tilting up

With the conventional external cylinder, there are cases that the external cylinder interferes with the motorwell depending on the boat type. However, this Integrated Steering System eliminates such worries and is compatible with various types of transoms.


## Conventional DF350A/300B (with external steering components)

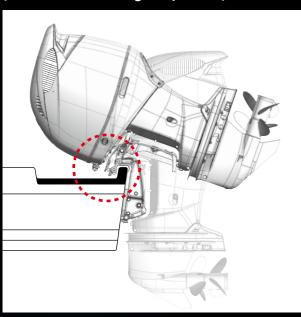

NEW DF350AMD/300BMD (Integrated Steering System)

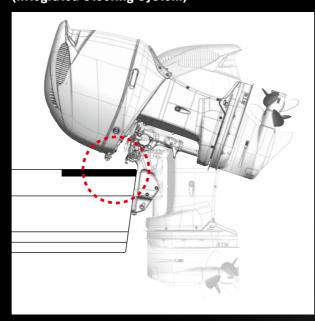

#### Structure of the Integrated Steering System

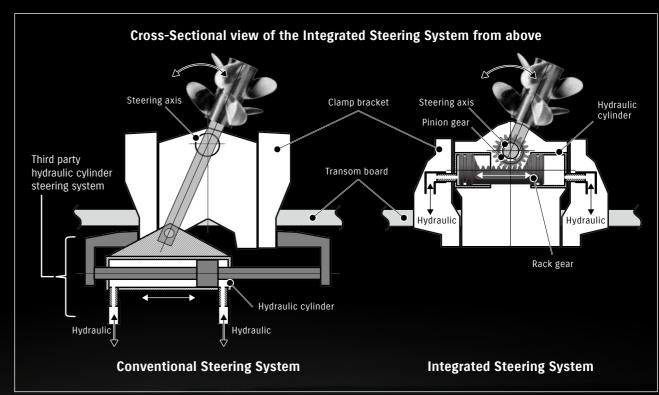




# **ADVANCED GEAR CASE**

## **Durability & Reliability**

**■ Lower Gear Oil Temperature** 

To improve reliability, the circulation of the gear oil has been improved, which reduces the temperature rise of the gear oil.

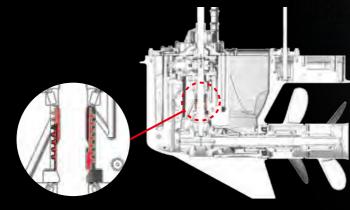


## Performance

#### ■ Increased Top Speed

The new designed gear case reduced 4% of the frontal projected area which increased the Top Speed by more than 2%\*.



<sup>\*</sup>The data is based on "In-House Suzuki Testing" under uniformed conditions. Results will vary depending upon operating conditions (boat design, size, weight, weather, etc).

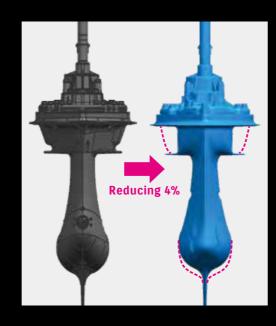

## **Ease & Comfort**


## ■ New mechanism for changing gear oil

By adding a special oil passage, Gear oil can be changed without lifting the boat by using an oil changer.

#### **■** Compatible with conventional models

Lower unit including the Advanced Gear Case is compatible with the conventional DF350A / DF300B and it is installed as standard for all models\*(DF350AMD/300BMD, DF350A/300B).

 $\ensuremath{^\star}$  For all PY2023 Production Models with the 5-SERIES Model Indicator



Special Oil Passage for the gear oil changer


# **Ecology & Economy**

## **■ Improved Fuel Efficiency**

Adopting the New Advanced Gear Case contributes to the better Fuel Efficiency.

#### ■ Reduced Gear Oil

The improved gear case design reduces the amount of gear oil from 3.2 $\ell$  to 2.8 $\ell$ .

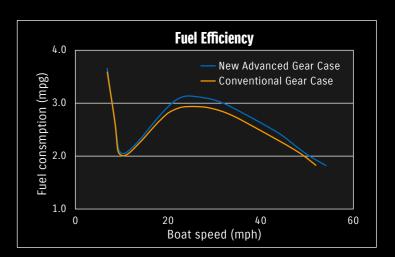


\*The data is based on "In-House Suzuki Testing" under uniformed conditions. Results will vary depending upon operating conditions (boat design, size, weight, weather, etc).

# DF350A/300B ENGINEERED TO BE EXCEPTIONAL

## **Dual louver**

#### DIRECT INTAKE SYSTEM AND DUAL LOUVER SYSTEM FOR COOL AND DRY AIR

The New models, DF350AMD/300BMD, DF350A/300B are equipped with a dog-leg shaped Dual Louver at the air intake on the cowling. This helps to remove any moisture that may be ingested through the air intake on the cowling. Incorporating a direct intake system makes the compression ratio of 12.0:1 (DF350AMD / 350A), 10.5:1 (DF300BMD / 300B) possible, ultimately leading to a higher engine output.

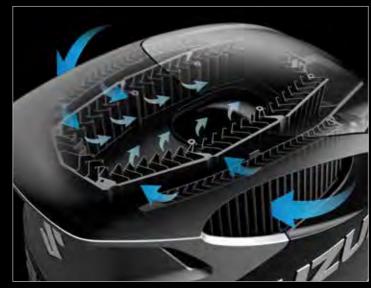

**SUZUKI DUAL LOUVER SYSTEM** 

## **Dual Prop**

#### DEVELOPMENT OF SUZUKI'S FIRST CONTRA-ROTATING PROPELLER

Developed in 2017, the Dual Prop system efficiently turns the engine's output into propulsion under water. As an added benefit, because each propeller rotates in a different direction, exceptional stability is achieved. In addition, the contra-rotating propellers produce a strong reverse thrust.



**SUZUKI DUAL PROP SYSTEM** 



#### **DUAL INJECTORS FOR BOTH COOLING AND POWER**

Efficient combustion and suppression of knocking are necessary to produce more power.

Suzuki achieved efficient combustion with optimal fuel injection by adopting the Dual Injector and with optimum combustion chamber configuration.

Further, the Dual Injector atomizes the fuel to enhance the cooling action in the combustion chamber and suppress knocking.

In fact, Suzuki has succeeded in increasing the output by 3%.



**DUAL INJECTOR** 

## **Dual Water Inlet**

#### **DUAL WATER INTAKES**

Designing the shape of the gear case also required repositioning the water intakes. It was important to arrange the main and sub intakes as far apart from each other as possible, and to design them to ensure a reliable amount of cooling water, especially at high speeds.



**DUAL WATER INLET** 

# BUILT ON OUR HISTORY OF PROVEN TECHNOLOGIES.

## Durability & Reliability



**SELF-ADJUSTING TIMING CHAIN** 



**ANTI-CORROSION FINISH** 



WATER DETECTING SYSTEM



**TILT LIMIT** 



SDSM+(Optional)



**KEYLESS START SYSTEM(Optional)** 

## **Performance**



**OFFSET DRIVESHAFT** 



2-STAGE GEAR REDUCTION



**VARIABLE VALVE TIMING** 



**DIRECT INTAKE** 



SUZUKI PRECISION CONTROL(SPC)



**NOISE REDUCTION** 



TROLL MODE



**EASY START SYSTEM** 



**AUTOMATIC TRIM(Optional)** 



## **Ecology & Economy**

LEAN BURN CONTROL SYSTEM





#### **SPECIFICATIONS**

Model	DF350AMD	DF300BMD	DF350A	DF300B	
Starting System	Electric		Electric		
Recommended Tramsom Height (in)	L:20 X:25 XX:30		X:25 XX:30		
Weight (lbs)*		761 776 794	X:727 XX:747		
Valve Train	DOHC 24	4 Valves	DOHC 24 Valves		
Valve Train Drive	Chain		Chain		
Displacement(cm³)	4,390		4,390		
Maximum Output(kW)	257.4	220.7	257.4	220.7	
Bore and Stroke(mm)	98 x 97		98 x 97		
Operation Range(rpm)	5700-6300	5300-6300	5700-6300	5300-6300	
Fuel Delivery System	Electronic Fu	uel Injection	Electronic Fuel Injection		
Oil Pan Capacity(L)	8.	.0	8.0		
Alternator	12V 54A		12V 54A		
Trim Type	Power Trim and Tilt		Power Trim and Tilt		
Gear Ratio	2.29		2.29		
Control System	DBW		DBW		
Recommended Fuel	89 OCTANE	87 OCTANE	89 OCTANE 87 OCTANE		
Propeller Selection	12"-3	31.5"	12"-31.5"		

<sup>\*</sup>Dry Weight : Including battery cable, not including propeller and engine oil.

#### **DIMENSIONS**

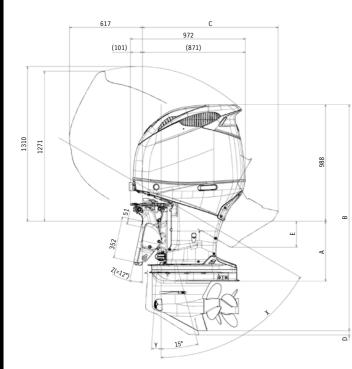



#### DF350AMD/300BMD

Transom	Α	В	С	D	E	X	Υ	Z
XX	726	2,168	1,370	37	346			
Χ	635	2,041	1,260	37	282	68°	4°	12°
L	508	1,914	1,150	37	219			

#### **FEATURES**

Model		DF350AMD/300BMD	DF350A/300B	
BODY COLOR	Black	•	•	
BODY COLOR	White	•	•	
NEW INTEGRATED STEERING SYSTEM		•		
ADVANCED NEW GEAR CASE*1		•	•	
SUZUKI DUAL LOUVER SYSTEM		•	•	
DUAL INJECTOR		•	•	
DUAL WATER INLET		•	•	
SUZUKI DUAL PROP SYSTEM		•	•	
DIRECT AIR INTAKE		•	•	
OFFSET DRIVESHAFT		•	•	
2-STAGE GEAR REDUCTION		•	•	
SELF-ADJUSTING TIMING CHAIN		•	•	
WATER DETECTING SYSTEM		•	•	
VARIABLE VALVE TIMING SYSTEM		•	•	
SUZUKI PRECISION CONTROL		•	•	
NOISE REDUCTION		•	•	
SUZUKI TROLL MODE SYSTEM*2		•	•	
SUZUKI EASY START SYSTEM		•	•	
LEAN BURN CONTROL SYSTEM		•	•	
DIRECT IGNITION		•	•	
NEW KEYLESS START SYSTEM		0	0	

0

0

\*1 For all PY2023 Production Models with the 5-SERIES Model Indicator
\*2 available by using with SMG4/SMD/Troll Mode Switch Panel
\*3 available by using with SMD/SMG4

SUZUKI DIAGNOSTIC SYSTEM MOBILE Plus

TILT LIMIT SYSTEM **OVER-REV. LIMITER** 

AUTOMATIC TRIM SYSTEM\*3

LOW OIL PRESSURE CAUTION FRESH WATER FLUSHING SYSTEM

**SUZUKI ANTI-CORROSION SYSTEM** 



Please read your owner's manual carefully. Remember, boating and alcohol or other drugs don't mix. Always wear a personal flotation device when boating. Please operate your outboard safely and responsibly. Suzuki encourages you to operate your boat safely and with respect for the marine environment.

Specifications, appearances, equipment, colors, materials and other items of "SUZUKI" products shown on this catalogue are subject to change by manufacturers at any time without notice and they may vary depending on local conditions or requirements. Some models are not available in some territories. Each model might be discontinued without notice. Please inquire at your local dealer for details of any such changes. Actual body color might differ from the colors in this brochure.



● =Standard Equip. ○ =Optional Equip.

 $\circ$ 

0

SUZUKIMARINE.COM